



Mobile Anchorage System



English
Version


SHE LifeLine System

SHE LifeLine System

Mobile anchorage system

Tested and certified

- according to EN 795:2012 Class C
- maximum system length 50m
- maximum field length 8,5m
- minimum field length 3m
- approved for max. 4 people

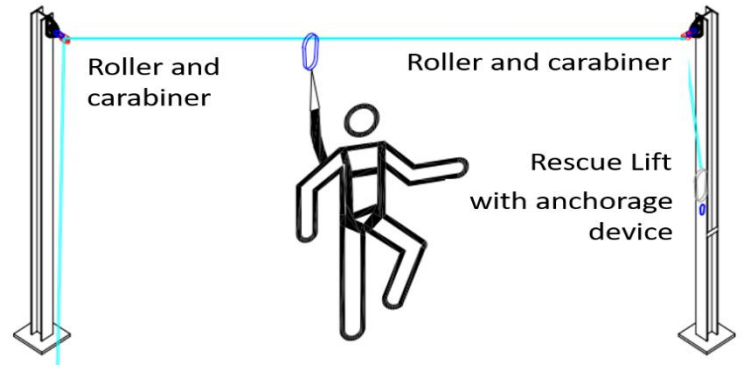

The **SHE LifeLine system** is used as a mobile anchorage device, e. g. for work on foundations. The system consists of the SHE Rescue Lift, a 10.5mm SHE core jacket rope and a tension indicator. The equipment may only be used with a safety harness according to EN 361 and a lanyard with shock absorber according to EN354/355. A maximum of 4 persons can be secured simultaneously at the anchorage device.



The maximum permissible length of the SHE LifeLine system is 50m. The free span of a field may not exceed a maximum of 8.5m and at least 3.0m. If the span is greater than 8.5m, an intermediate fixing for the rope must be installed, e. g. the mobile SHE support. The pretension of 1kN of the SHE core-sheathed cable is carried out via the pretension indicator.

When used on the foundation, 7 supports can be installed. The supports are screwed around the foundation. Each support has a lifting point where the pulley, which is pre-assembled on the rope, is attached with a carabiner. The complete system is closed in a loop.



The securing of the persons is carried out in the rope of the abseiling and rescue hoist by means of a connection device with shock absorber. If a person falls into the system, the accident victim can be dumped immediately with the SHE Rescue Lift installed on the system.

The SHE props must be dismantled at any time and reused at a different location.